ALBUQUERQUE VAULT COMPANY
PRE-CAST CONCRETE PRODUCTS
300 Airport Dr., NW * Albuquerque, NM 87121 * Phone: 505-836-4404 / Fax: 505-836-5663

Detail # GT-3,000

Not To Scale | Aug 3,2014

3000 GREASE TRAP SYSTEM INSTALLATION UTILIZING 2 BOXES

GENERAL NOTES:
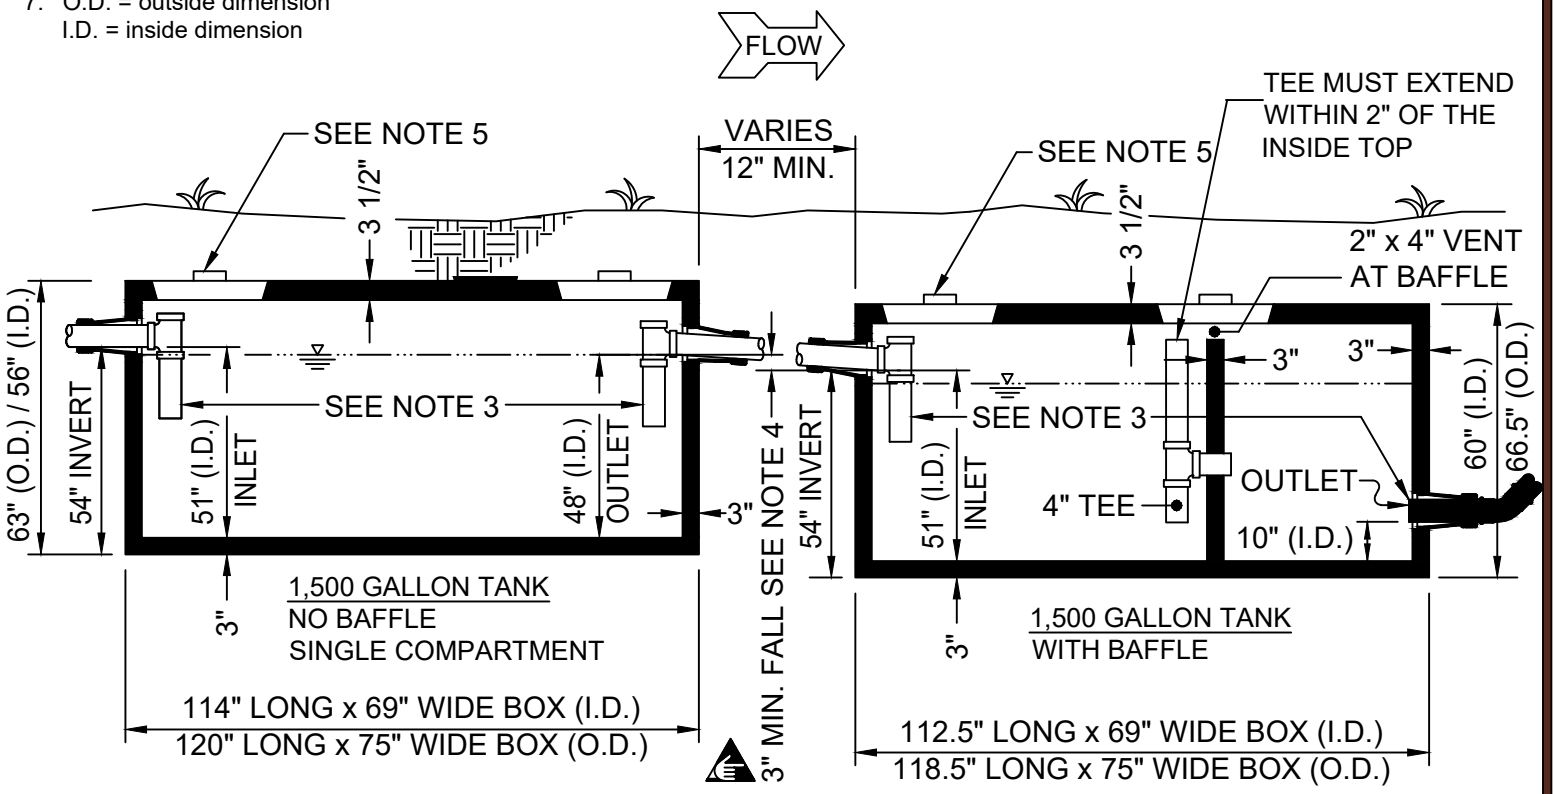
1. Design specifications conform to latest ASTM C1227 specifications for "Precast Concrete Water and Wastewater Structures"
2. Pipe penetration locations as per job requirements. Pipe inlet and outlet locations to have cast-in-place boots. Pipe to be installed by contractor.
3. Inlet and outlet requirements such as tee's and/or effluent filters supplies and installed by contractor.
4. A minimum of 3" fall required from outlet to inlet between the 2 tanks.
5. Casting / Top provided and installed by contractor / customer per job requirements. 2", 3", 4" & 6" grade rings can be supplied by Albuquerque Vault Co. or field adjusted, using approved methods by contractor.
6. Excavation hole bottom shall be 2' wide & 2' longer than total outside dimensions.
7. O.D. = outside dimension
   I.D. = inside dimension